



**seasunaquarium.com**

**SeaSun aquarium**



[Aquarium Product](#)



[UVC & Ozone \(Freshwater & Saltwater\)](#)



[UVC Sterilizer](#)



Oase (UVC Sterilizer) Bitron C 36w (40000 liters)


[Oase \(UVC Sterilizer\) Bitron C 24w \(25000 liters\)](#) [Oase \(UVC Sterilizer\) Bitron C 55w \(60000 liters\)](#)



Brand: ([Oase](#))  
Product Name: Oase (UVC Sterilizer) Bitron C 36w (40000 liters)  
SKU: Oase Bitron C 36w (40000 liters)  
Barcode Link: **Price: Baht 25,200.00**  
[Ask a question about this](#)  
pro 1925  
0 Oase (UVC Sterilizer) Bitron C 36w  
40000 Baht 25,200.00  
Twister system

shop.cart

185
cartAdd
com_virtuemart
4

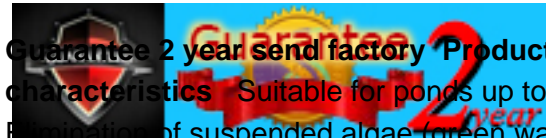

**Guarantee 2 year send factory Product**

**characteristics** Suitable for ponds up to 40 m<sup>3</sup>

Elimination of suspended algae (green water)

Reduction of harmful bacteria and pathogen levels

UVC radiation is at its best at all times thanks to

patented, autonomous bulb cleaning Bypass

technology enables optimal irradiation of the polluted

water, even at high flow through rates Individual

water flow adjustment for optimal adaptation to the

connected filter pump Integrated magnets protect the

UVC technology against limescale deposits Visual

function check of the UVC bulb 100 %, VDE-certified

safety; does not cause eye injuries Quick release

technology for easy bulb replacement High quality

workmanship with impact resistant plastic housing

Incl. high quality UVC bulb Including OASE Clear

Water Guarantee in conjunction with the OASE flow

through filters, BioSmart, BioTec and ProfiClear

**Dimensions (L**

**x W x H) (mm)** 600 x 180 x 198

**Rated voltage** 220 – 240 V / 50/60 Hz

**Power consumption** 36 W

**Power cable length (m)** 5,00

**Net weight (kg)** 4,48

**Guarantee** 2 Years

**UVC power** 36 W

**Temperature display** No

**Bypass control** manually

**UVC operating hours meter** No

**Number of inlets (EA)** 1

**Connections, inlet (mm)** 19/25/32/38/50

**Connections, inlet** ¾", 1", 1¼", 1½", 2"

**Number of outlets (EA)** 2

**Connections, outlet (mm)** 25/32/38

**Connections, outlet** 1", 1¼", 1½"

**Min. flow rate (l/h)** 8000

**Max. flow rate** 30000  
**(l/h)**  
**Max. operating**  
**pressure (bar)** 0,50

•

---

### Customer Reviews:

There are yet no reviews for this product.  
Please log in to write a review.

---

**You may also be interested in this/these product(s)**

[Vendor Information](#)